PHOTOZUELA®

Live your passion well equipped.

2011 CATALOG

Version 8.69

WWW.PHOTOZUELA.COM

Message from The Management

Our involvement with our products begin from conceptualization, extended to execution on the factory floor and ends with our products reaching your hands faithfully delighting your expectations. We practice a stepwise supply chain monitoring process to ensure quality and performance of our products while supporting to maintain a reasonable and sustainable pricing mechanism. Photozuela pushes to open enhanced alternative avenues of growth for all levels of photographers and cinematographers; may you be an amateur, hobbyist, and professional. We achieve this by continuously offering accessories and equipment matched to your needs.

We believe in:

Innovation: Constant research, critical thinking and positive input towards transforming existing concepts

Quality: Stepwise and in-house quality control

Endurance: We reminisce the time when products were crafted to last and we try to embed this belief in our products

Asia is the biggest market in the world. The need for responsible e-commerce initiatives are enormous. In Photozuela we are like you, artists and entrepreneurs who want to contribute to society with passion and integrity.

Photozuela, live your passion well equipped.

PHOTOZUELA is a project of

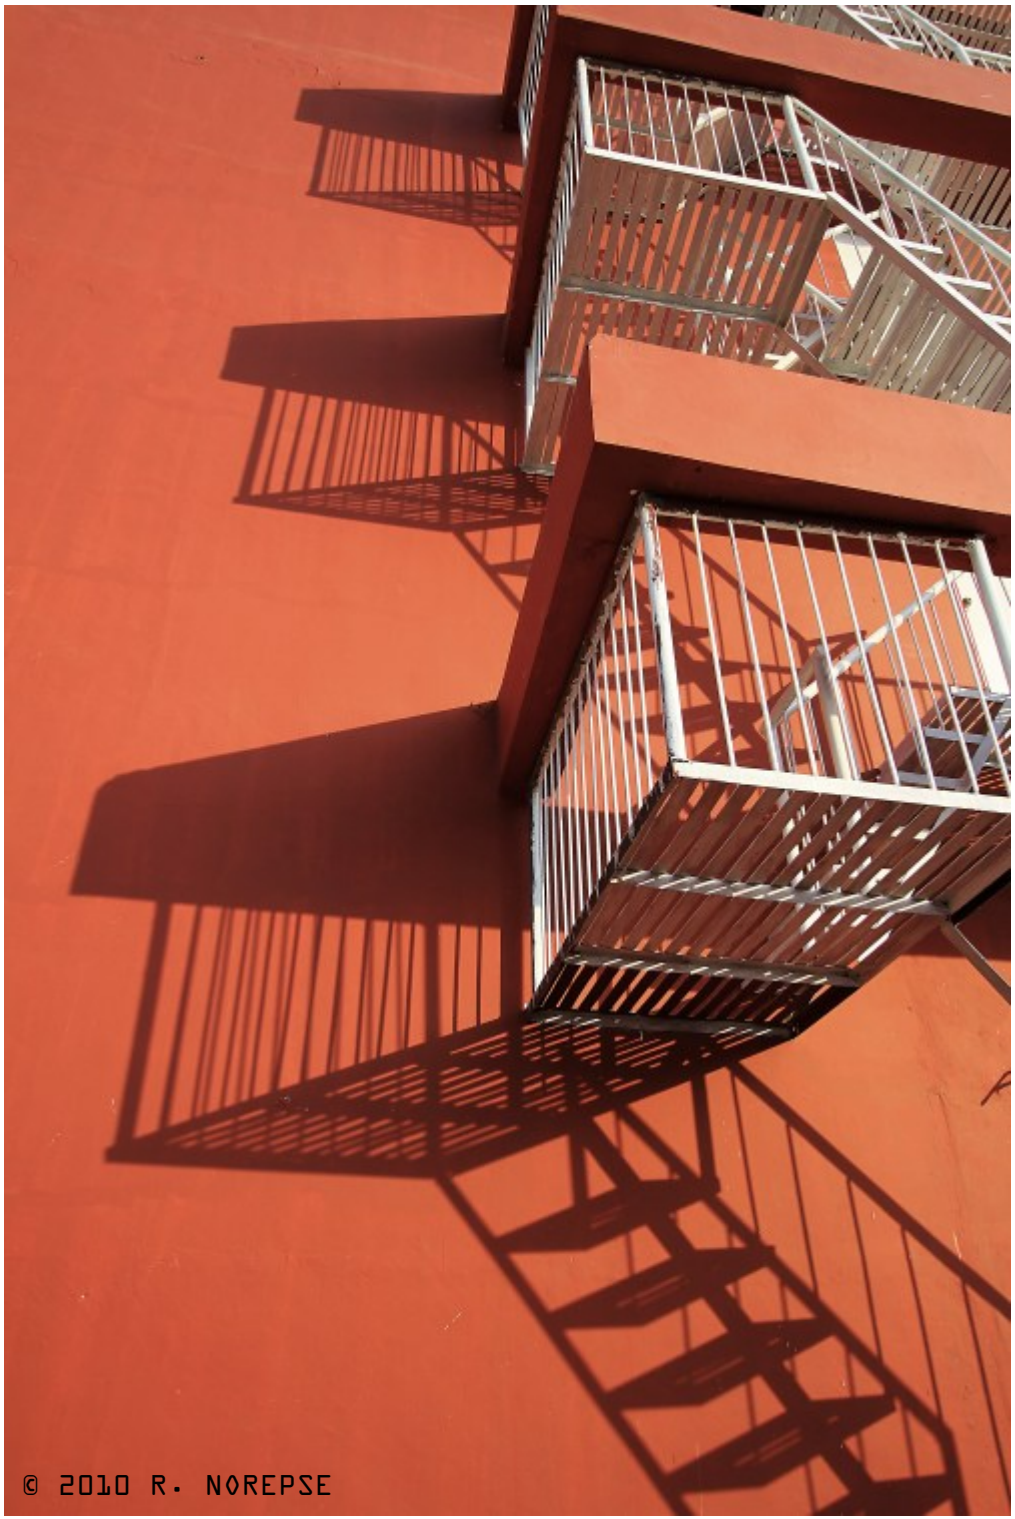

STUDIO FLASH

Kremlin 150 Code: MPM-150LE

Eiffel 200 Code: PSA-200EX

Shibuya 250 Code: ATD-250GS

Vegas 300 Code: RMF-300GT

Broadway 500 Code: MFA-500BA - Coming Soon

Merida 800 Code: BRV-800VE - Coming Soon

Milan 1000 Code: UBF-1000TW - Coming Soon

Spares

Replacement Flash Tubes for New Flash Models.
Replacement Modeling Lamps.

Other Flash and Model Lamp Spares

Replacement Flash Tube for Basic Kit
Replacement Flash Tube for Basic Kit Plus
Replacement Flash Tube for Duo Kit Pro
Replacement Flash Tube for Trio Kit Pro
Replacement Flash Tube for Trio Kit Pro Plus
Spare Modeling Lamp for Duo and Trio Kits

Supports

Light Modifiers

Studio Accessories

How to Choose

Step 1. Choose your studio flash or kit.

Know what you are going to use it for.

All our flash units have a Guide Number (GN) value in each their specifications at full power. You can use the GN to calculate your flash-to-subject distance or workspace. The guide number of a flash is an indication of its power. The higher the number, the more powerful the flash.

A guide number is found by multiplying the flash-to-subject distance by the aperture for a well-exposed photograph. So if good results are produced by using f/8 for a subject 4m away, the guide number is 32. You need to know the film speed used (ISO), and that the distance was measured in meters, so guide numbers are usually written as '32 (ISO 100, meters)'.

Once the guide number has been determined, you can use it in reverse. Divide the number by the subject distance (in meters) to find the aperture needed for the exposure. For example, if the guide number is 32 (ISO 100, meters) and the subject is 4 meters away, you need an aperture of f/8. It will be possible to double your aperture when you increase your ISO.[1]

Step 2. Choose your support.

We carry standard light stands as well as models with booms and air cushion features. We also have them at different height and length. Some of our light stands have a vertical and horizontal mounting feature as well.

Step 3. Choose your light modifier.

What quality of light do you need your subject be illuminated with? This is a starting point question to yourself. Adding a light modifier such as a softbox or bouncing the flash onto a reflective umbrella will reduce the effective GN of your flash unit. More so, there are modifiers which focus and shape your flash such as a snoot or honeycomb. Google is a very good tool to find out what you need as there are many opinions about light modifiers; but normally, you will be generally fine with a softbox and or an umbrella - it just depends on WHERE and HOW you modify, manipulate, and position them after.

Step 4. Choose accessories.

Don't forget to get a flash trigger unless you want to have them all on slave mode. Ask us about an extra receiver for a second, third or fourth studio flash.
In our Studio Accessories, we also carry adapters for your camera hot shoe to connect your sync cord when you have your camera in a stationary situation. If you do have a an existing Bowens mount light modifier, we can provide you with an Elinchrom-to-Bowens mount attachment so you can continue using your existing equipment.

Step 5. Purchase and Information

You may call, email, chat or text us freely - our contact information are located on the last pages of the catalog and in our products. We have multiple modes of payment avenues including online credit card check out. We are open to your questions about our products. You may also go to the TERMS section of this catalog for warranty information and support coverage.

[1] with excerpts from the Canon Professional Network
http://cpn.canon-europe.com/content/index.do

* This Page is an open document. Please email us your suggestions or any corrections.

INSTANT SAVINGS! Premium Studio Flash Kits

Pioneer Kit Code: PN-1K

1pc Kremlin 150 Studio Flash
(Included as Standard)

1pc Standard Light Stand
SS-46S

1pc Square Soft Box
SB-66SS

Pioneer Kit with
Kremlin 150
MPM-150LE
P6100
Save P1000!
ea. kit

EXTRAS

Add A Hot Shoe PC Sync Adaptor HS-A2
For Use with Photo Booth
P440
ea.

Protect Your Investment! Add this Padded, Rolling Equipment bag EB-40B
P3300
ea.

CLICK HERE to see other add-ons compatible with your Strobes.

Studio Flash Upgrade Options

Pioneer Kit with
Eiffel 200
PSA-200EX
P6975
Save P1000!
ea. kit

Pioneer Kit with
Shibuya 250
ATD-250GS
P7670
Save P1000!
ea. kit

Pioneer Kit with
Vegas 300
RMF-300GT
P9435
Save P1000!
ea. kit

KEY BENEFITS

- **Best for photo booth business, especially when paired with a camera hot shoe sync adapter HS-A2** for stationary shooting plus without the hassle of changing wireless trigger batteries. **Also great for students!**
- If you're starting out with your **first home or small business studio**, this is the kit to go for. As you develop new skills and or budget you can add more studio flash (even a more powerful one), or accessories as needed.
- This 1 strobe kit **can be an addition to your existing setup**
- All **our studio flash feature technologies not seen on other affordable flash.** Check out their specs on the next pages and compare.
- All our other Photozuela accessories such as barn doors, snoots, beauty dish (with optional honeycomb) are compatible with all our studio flash.

Restrictions: To be eligible for the instant savings, Light stand SS-46S and soft box SB-66SS must not be replaced by other models.

INSTANT SAVINGS!

Premium Studio Flash Kits

Odyssey Kit Code: DS-2K

2pcs Eiffel 200 Studio Flash (Included as Standard)

2pcs VH-15A, Air Cushioned Light Stand with Versatile Spigot

2pcs Rectangular Soft Box SB-69RS

1pc Trigger and receiver set TRIG-4TR set plus extra receiver for the second strobe, TRIG-4R (1pc).

EXTRAS

Protect Your Investment When Mobile!
Add this Padded, Rolling Equipment bag EB-40B
P3300
ea.

CLICK HERE to see other add-ons compatible with your Strobes.

Odyssey Kit with Eiffel 200 PSA-200EX
P17335
Save P1800!
ea. kit

Studio Flash Upgrade Options

Odyssey Kit with Kremlin 150 MPM-150LE
P15855
Save P1500!
ea. kit

Odyssey Kit with Shibuya 250 ATD-250GS
P18925
Save P1500!
ea. kit

Odyssey Kit with Vegas 300 RMF-300GT
P22595
Save P1500!
ea. kit

KEY BENEFITS

- Two Strobes are **best for a larger photo booth business**, **grad pictorials, class pictures, weddings, conference, debuts** and the like.
- If you need the **versatility of two strobes**, this is the kit you need. Two Strobes can illuminate two points of interest on your shots. Most **effective for large groups and subjects**. Examples are: large stills or groups of people. Additionally, the Odyssey Kit can also fill a larger home, office, or shop studio.
- All **our studio flash feature technologies not seen on other affordable flash.** Check out their specs on the next pages and compare.
- All our other Photozuela accessories such as barn doors, snoots, beauty dish (with optional honeycomb) are compatible with all our studio flash.

Restrictions: To be eligible for the instant savings, the 2 pieces light stands SS-47A, 2 pieces soft box SB-69RS, 1pc TRIG-4TR, and 1pc TRIG-4R must not be replaced by other models.

INSTANT SAVINGS! Premium Studio Flash Kits

Crusader Kit Code: SD-3K

3pcs Shibuya 250 Studio Flash (Included as Standard)

3pcs VH-15A, Air Cushioned Light Stand

2pcs Rectangular Soft Box SB-69RS, 1pc Dual Purpose Umbrella UM-36DP

1pc Trigger and receiver set TRIG-4TR set plus extra receiver for the second strobe, TRIG-4R (2pcs).

At the moment, we only have one equipment bag Code: EB-40B. Please ask out sales staff if your choices fit inside our current offer bag.

CLICK HERE to see other add-ons compatible with your Strobes.

Studio Flash Upgrade Options

Crusader Kit with
Kremlin 150
MPM-150LE
P23185
Save P2000!
ea. kit

Crusader Kit with
Eiffel 200
PSA-200EX
P25705
Save P2000!
ea. kit

Crusader Kit with
Vegas 300
RMF-300GT
P33295
Save P2000!
ea. kit

Crusader Kit with
Shibuya 250
ATD-250GS
P27290
Save P2500!
ea. kit

KEY BENEFITS

- **Three strobes enhances your creativity more** with multiple points of interests illuminated in your shots. **This kit is best for larger studios and events.**
- All **our studio flash feature technologies not seen on other affordable flash.** Check out their specs on the next pages and compare.
- All our other Photozuela accessories such as barn doors, snoots, beauty dish (with optional honeycomb) are compatible with all our studio flash.

Restrictions: To be eligible for the instant savings, the 3 pieces light stands SS-47A, 2 pieces soft box SB-69RS, 1pc dual duty umbrella UM-36DP, 1pc TRIG-4TR, and 2pc TRIG-4R must not be replaced by other models.

Options/Compatibility Guide For Studio Flash, Montana C600, and Bianco Luce 330

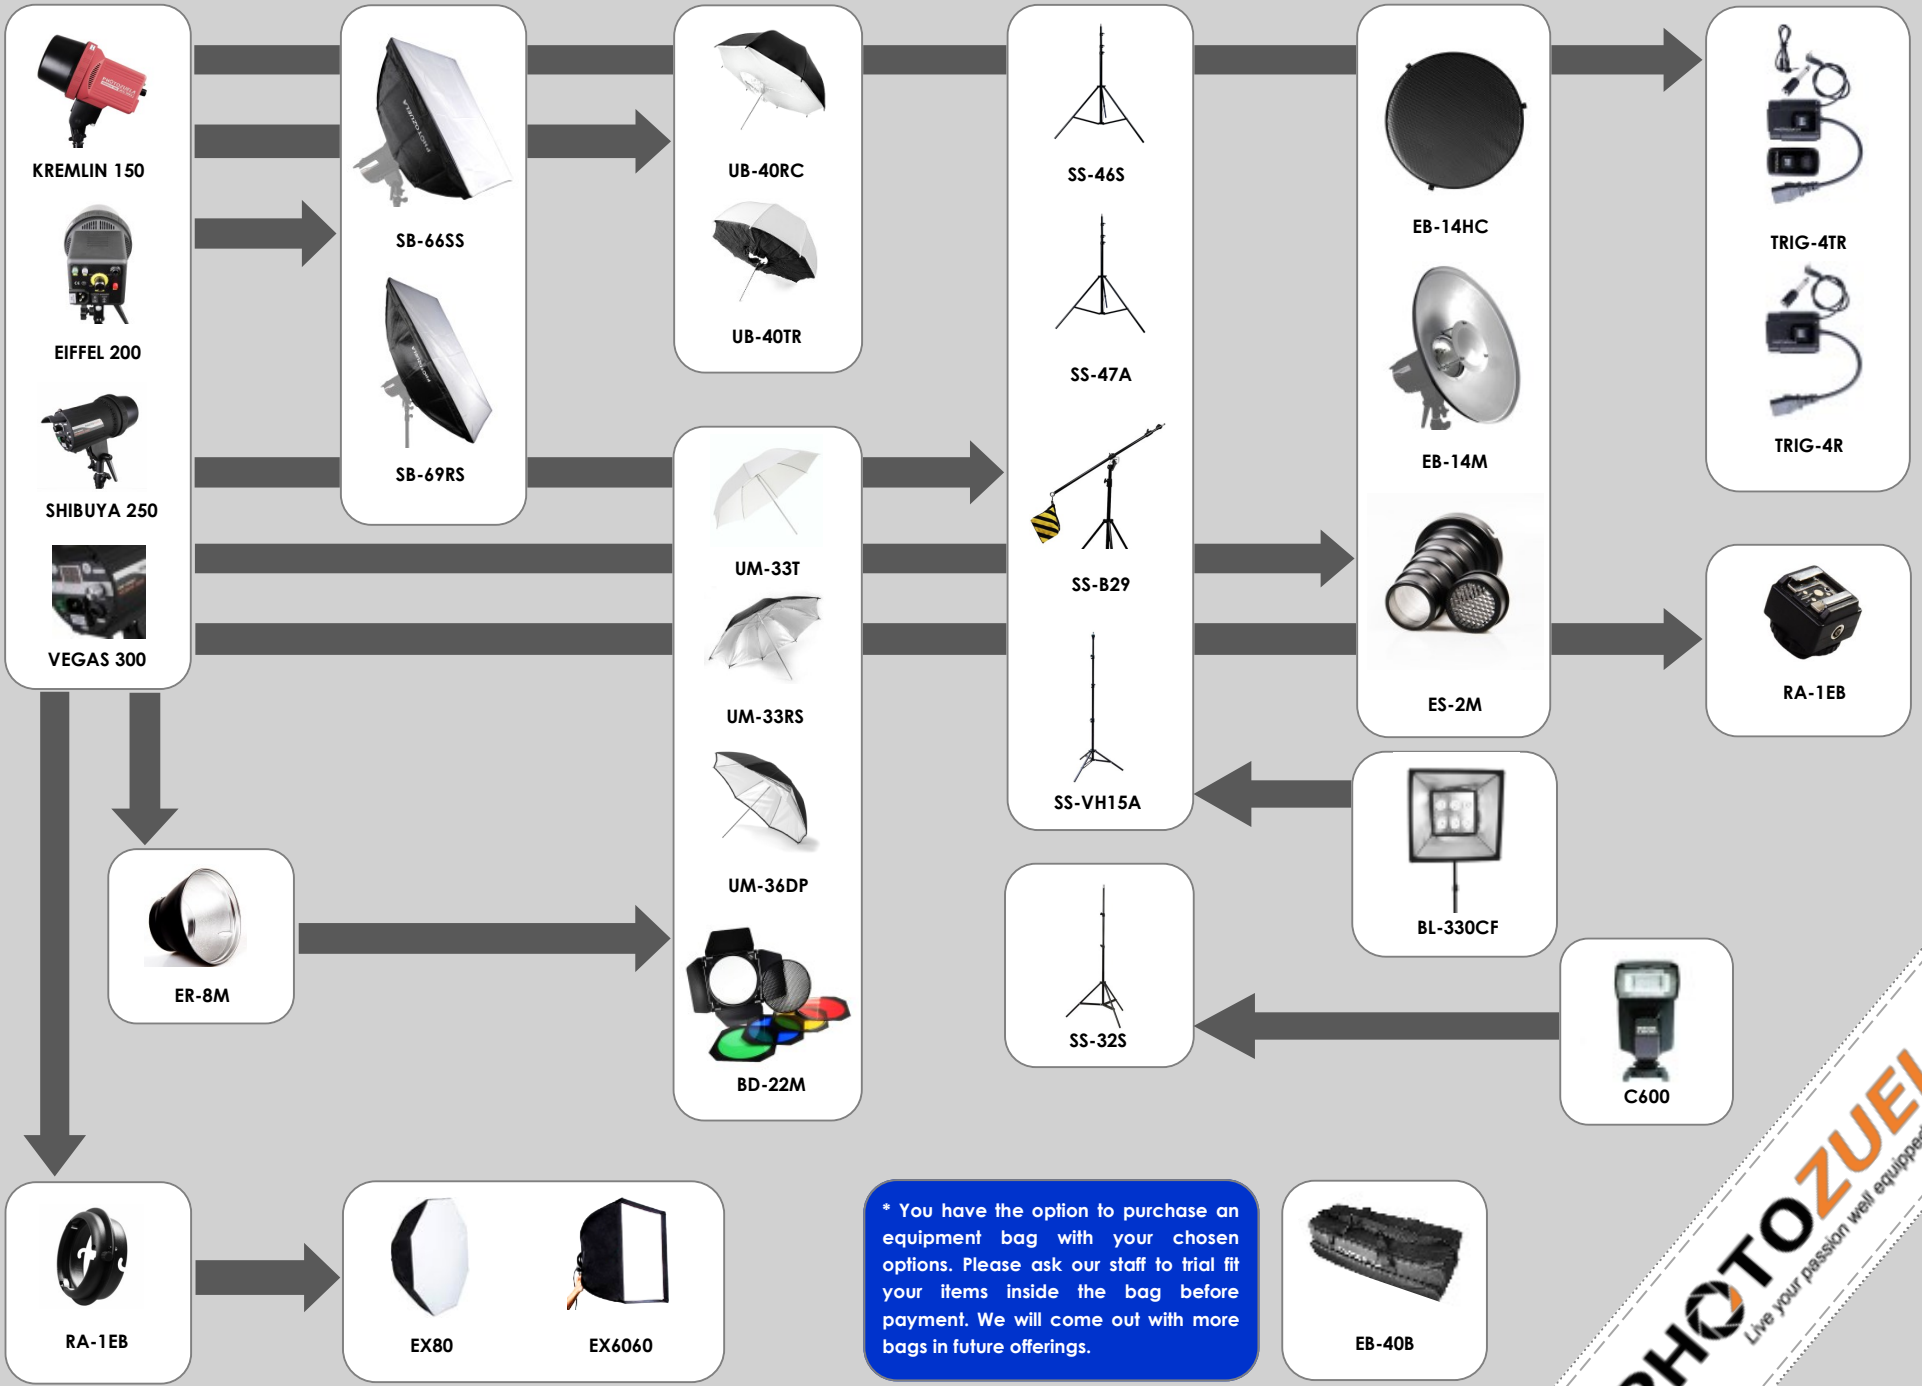

* You have the option to purchase an equipment bag with your chosen options. Please ask our staff to trial fit your items inside the bag before payment. We will come out with more bags in future offerings.

PHOTOZUELA® Live your passion well equipped.

PHOTOZUELA

KREMLIN 150 | MPM-150LE

PHOTOZUELA

EIFFEL 200 | PSA-200EX

STUDIO FLASH

Your search stops here!

- Modern Design and Finish
- Samsung / NEC Processor Precision
- Durable and Lightweight
- Air Cooled Performance
- Advanced Safety Features
- Versatile Functionality
- Auto-Discharge Function

PHOTOZUELA Kremlin 150 Code: MPM-150LE Available in RED only

GN32 Elinchrom Mount Only / **Reflector Sold Separately**

Flash Unit Only w/o Reflector
Kremlin 150
MPM-150LE
P4880
ea.

* All Models Include Protective Cover for Flash Tube, Sync and Power Cord, Modeling Lamp

PHOTOZUELA Eiffel 200 Code PSA-200EX

GN42 Elinchrom Mount Only / **Reflector Sold Separately**

Flash Unit Only w/o Reflector
Eiffel 200
PSA-200EX
P5720
ea.

MODEL OPTIONS	KREMLIN 150 Code PSA-200EX MATTE RED	EIFFEL 200 Code PSA-200EX MATTE BLACK
Recycle Time	1-2s	1-2s
Output Power Control Range	**Precise Control by Samsung Processor** 1/8 - 1/1 Step-less Adjustment with Auto Dump Feature	**Precise Control by Samsung Processor** 1/8-1/1 Step-less Adjustment
Modeling Lamp	75W **Included** (Do Not Use A Lamp More than 75W)	75W **Included** (Do Not Use A Lamp More than 75W)
Color Temperature	5600K	5600K
Flash Duration	1/600-1/1000s	1/600-1/1000s
Flash Triggering Method	Photocell / Test Button / Wireless Trigger	Photocell / Test Button / Wireless Trigger
Triggering Voltage	5V	5V
Sync Distance	≥ 10m	≥ 10m
Working Voltage / Wattage	180-250V 50-60Hz / 150Ws	180-250V 50-60Hz / 200Ws
Safety Features	**Cooling Fan, Over Heat / Over Work Protection Circuit**	**Cooling Fan, Over Heat / Over Work Protection Circuit**
Standard Accessories	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging
Construction	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.
Warranty	**6 Months Service Warranty**	**6 Months Service Warranty**

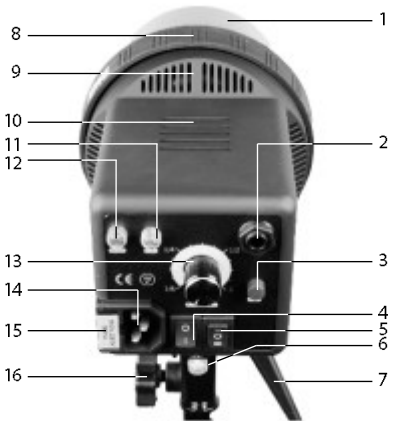

CONTROLS/PARTS Kremlin 150 and Eiffel 200

1. Flash Tube / Model Lamp Cover
2. Sync Socket 1/4"
3. Flash Test Button
4. Main Power Switch
5. Model Lamp/Flash Toggle Variable and Fixed Settings
6. Umbrella Lock
7. Tilt Locking Lever
8. Attachment Release Ring
9. Heat Vents
10. Flash Charge Indicator
11. Photo Cell
12. Flash Charge Indicator
13. Power Control Knob
14. Power Socket
15. Fuse (with Spare)
16. Light Stand Spigot Lock
17. Attachment Slot
18. Model Lamp
19. Flash Tube
20. Base Reflector/Shield
21. Umbrella Hole

75W Modeling Lamp MDL-75H
P390
ea.

Kremlin 150

150Watt-seconds
GN32 @ ISO 100
Color: Red

Vs.

Eiffel 200

200Watt-seconds
GN42 @ ISO 100
Color: Black

STUDIO FLASH

Your search stops here!

- Modern Design and Finish
- Samsung / NEC Processor Precision
- Durable and Lightweight
- Air Cooled Performance
- Advanced Safety Features
- Versatile Functionality
- Auto-Discharge Function
- Anti-Red Eye Function

(Vegas 300)

- Quiet Auto-Discharge Function

(Vegas 300)

PHOTOZUELA Shibuya 250 Code: ATD-250GS

GN52 Elinchrom Mount / **Reflector Sold Separately**

Flash Unit Only w/o Reflector
SHIBUYA 250
ATD-250GS
P6415
ea.

* All Models Include Protective Cover for Flash Tube, Sync and Power Cord, Modeling Lamp

PHOTOZUELA Vegas 300 Code: RMF-300GT

GN54 Elinchrom Mount / **Reflector Sold Separately**

Flash Unit Only w/o Reflector
VEGAS 300
RMF-300GT
P8250
ea.

MODEL OPTIONS	SHIBUYA 250 Code ATD-250GS	VEGAS 300 Code RMF-300GT
Recycle Time	1-2s	1-2s
Output Power Control Range	**Precise Control by Samsung Processor** 1/8-1/1 Step-less Adjustment	**Precise Control by NEC Processor** 1/16-1/1 Step-less Adjustment
Modeling Lamp	75W **Included** (Do Not Use A Lamp More than 100W)	75W **Included** (Do Not Use A Lamp More than 100W)
Color Temperature	5600K	5600K
Flash Duration	1/600-1/1000s	1/600-1/1000s
Flash Triggering Method	Photocell / Test Button / Wireless Trigger	Photocell / Test Button / Wireless Trigger
Triggering Voltage	5V	5V
Sync Distance	≥ 10m	≥ 10m
Working Voltage / Wattage	180-250V 50-60Hz / 250Ws	180-250V 50-60Hz / 300Ws
Safety Features	**Cooling Fan, Over Heat / Over Work and Over Voltage Protection Circuit**	**Cooling Fan, Over Heat / Anti-red Eye / Over Work and Over Voltage Protection Circuit / Auto Discharge**
Standard Accessories	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging
Construction	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.
Warranty	**6 Months Service Warranty**	**6 Months Service Warranty**

CONTROL PANEL

1. High-Sensitivity Photo Cell
2. Overheat Protection Indicator
3. Power Control Knob for Flash and Model Lamp
4. Flash Charge Indicator
5. Flash Test Button
6. Sync Socket 1/4"
7. Power Socket
8. Fuse (with Spare)
9. Umbrella Hole
10. Umbrella Lock
11. Tilt Locking Lever
12. Grab Handle
13. Model Lamp Mode Switch Variable/Full
14. Buzz On/Off
15. Model Lamp On/ Off Switch
16. Main Power Switch
17. Cooling Fan
18. Light Stand Spigot Lock

100W Modeling Lamp MDL-100H
P480
ea.

75W Modeling Lamp MDL-75H
P390
ea.

CONTROL PANEL

1. High-Sensitivity Photo Cell
2. Grab Handle
3. Anti-Red Eye Function 1, 2, or 3 Pre-flash
4. Anti-Red Eye Function Selector Switch
5. Over Heat and Circuit Protection Indicator Lights
6. Power Control Knob/Model Lamp Mode Button
7. Sync Socket 1/4"
8. Power Socket
9. Fuse (with Spare)
10. Umbrella Hole
11. Umbrella Lock
12. Tilt Locking Lever
13. Model Lamp Mode Selector Full/ Variable
14. Flash Charging/ Discharge Indicator
15. Flash Test Button
16. Buzz On/Off
17. Main Power Switch
18. Cooling Fan
19. Light Stand Spigot Lock
20. Digital Display

Spares (Legacy Products)

Basic Kit Spare Flash Tube Code 45Ws
Code: FT-45L

FT-45L P150

Basic Kit Plus Spare Flash Tube 72Ws
Code: FT-72L

FT-72L P200

Duo Kit Pro Spare Flash Tube 120Ws
Code: FT-120L

FT-120L P380

Xingular 150 Spare Flash Tube 150Ws
Code: FT-150L

FT-150L P400

Trio Kit Pro Spare Flash Tube 160Ws
Code: FT-160L

FT-160L P430

Trio Kit Pro Plus Spare Flash Tube 300Ws
Code: FT-300L

FT-300L P840

Spare Model Light for Xingular 150, Duo Kit Pro Trio Kit Pro, and Trio Kit Pro Plus - 75Watts
Code: MDL-75HL

MDL-75HL P100

Quartz Light Kit Lamp 500W
QB-500

QB-500 P600

Quartz Light Kit Lamp 500W
QB-500C

QB-500C P600

PHOTOZUELA **Supports** Aluminum Light Stands, Booms, Holders

Supports

8' Height, Standard

Code: SS-46S

Material: Plastic/Aluminum
Folded height: 845mm
Unfolded height: 2360mm
Max. Tube Diameter: 29mm
Min. Tube Diameter: 22mm
Segments: 3

SS-46S P935 ea.

8' Height, Air Cushion Bolted Joints

Code: SS-47A

Material: Aluminum
Folded height: 740mm
Unfolded height: 2260mm
Max Tube Diameter: 33mm
Min. Tube Diamter: 22.2mm
Segments: 4

SS-47A P1550 ea.

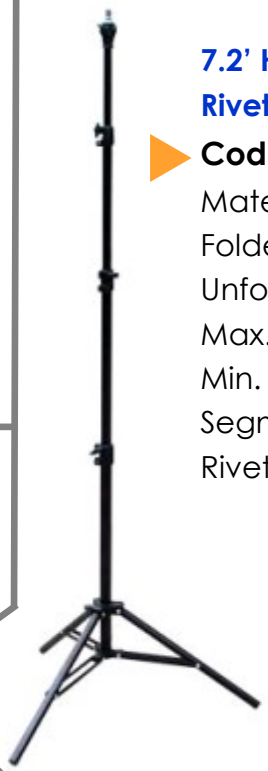

7.2' Height, Air Cushion Riveted

Code: SS-VH15A

Material: Aluminum
Folded height: 705mm
Unfolded height: 2195mm
Max. Tube Diameter: 29mm
Min. Tube Diameter: 19
Segments: 4
Riveted Legs

SS-VH15A P1430 ea.

Flexible 1/4" and 3/4" Spigot can be Placed Vertically or Horizontally. Spigot Included.
for: SS-VH15A, SS-B29, SS-47A

Reflector Holder w/ Light Stand

Reflector Holder

Code: RH-618

Tube: 22mm -19mm -16mm
Length: 60 -180cm
Light Stand (Spring Cushion)
Height: 6.56'

Circular Reflector Not Included

Reflector Holder Kit RH-618 P1850 ea.

7.6' Height, with Boom Weight Bag; Boom Can Increase Stand Height Two-fold when positioned 90 degrees.

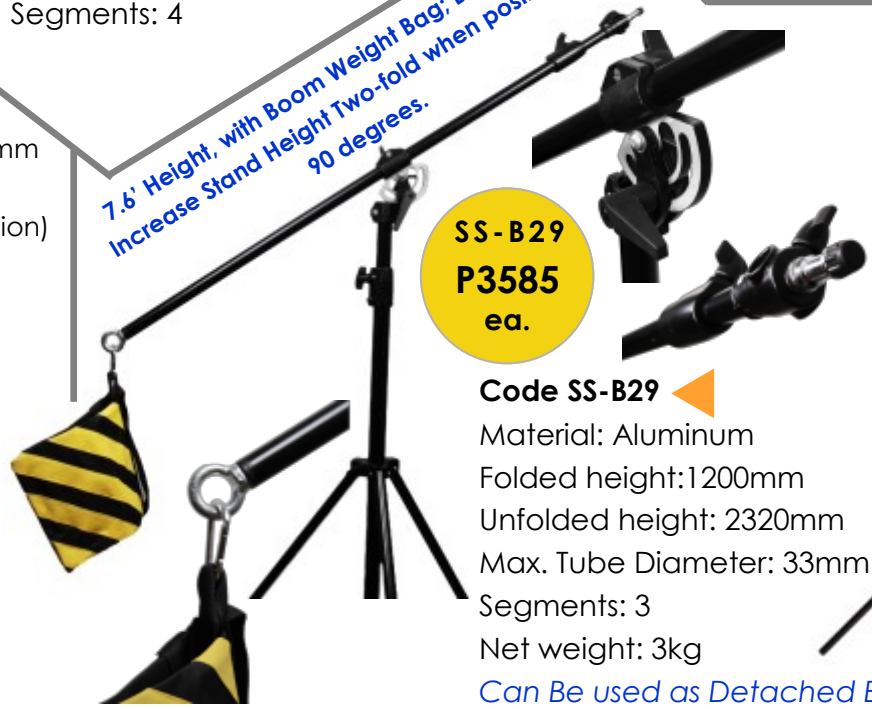

SS-B29 P3585 ea.

Code SS-B29

Material: Aluminum
Folded height:1200mm
Unfolded height: 2320mm
Max. Tube Diameter: 33mm
Segments: 3
Net weight: 3kg

Can Be used as Detached Boom

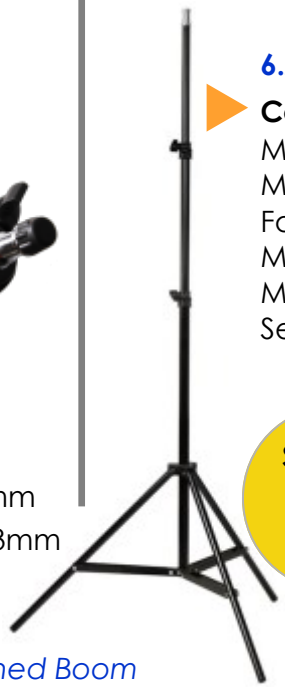

6.2' Height, Very Light Weight

Code: SS-32S

Material: Plastic/Aluminum
Max. Height: 1900mm
Folded Height: 660mm
Max. Tube: 22mm
Min. Tube Diameter: 16mm
Segments: 3

SS-32S P660 ea.

To complete your **strobist setup**, don't forget to add:
Reemix Wireless Trigger, Montana C600 Speedlight, UM-33RS or UM-33T Umbrellas, SH-12E Holder.

PHOTOZUELA Supports Aluminum Light Stands, Booms, Holders

SS-B12
P3215
ea.

Steel Tube Light boom with Stand

Light Stand:
Max. Height: 180cm
Segments: 2
Tube: 34.5mm, 29.5mm
Boom:
Length: 265cm
Tube Diameter: 35mm, 29.5mm
Counter: 4 kg

SS-B05
P2320
ea.

Basic Light Boom

Light Stand:
Max. Height: 200cm
Segments: 3
Tube Diameter: 25, 22, 19mm
Boom:
Length: 200cm
Tube: 35mm
Counter: 4 kg

EB-6B
P975
ea.

Light Stand Carry Bag

Fits Folded 105cm Stands

Light Modifiers

PHOTOZUELA **Light Modifiers**

Open Umbrellas, Umbrella Boxes, softboxes,, Snoots, Barn Doors, Color Gels, Reflectors, Filters

Square Softbox Standard
Elinchrom Mount
60x60cm
Code: SB-66SS

SB-66SS
P1320
ea.

Rectangular Softbox Standard
Elinchrom Mount
60x90cm
Code: SB-69RS

SB-69RS
P1430
ea.

36" Dual Purpose Umbrella
Translucent / Reflective Function
Code: UM-36DP

UM-36DD
P825
ea.

40" Umbrella Box Reflective
Code: UB - 40RC

UB-40RC
P1040
ea.

40" Umbrella Box Translucent
Code: UB-40TR

UB-40T
SS-46S
P1040
ea.

33" Translucent Umbrella
Code: UM-33T

To complete your **strobist setup**, don't forget to add: Reemix Wireless Trigger, Light Stand SS-32S, Montana C600 Speedlight, SH-12E Holder.

UM-33T
P380
ea.

33" Silver Reflective Umbrella
Code: UM-33RS

UM-33RS
P395
ea.

Don't forget to include a Reflector to prevent stray light if you plan to use an Open Umbrella with your studio flash. Please browse through the next pages.

Light Modifiers

PHOTOZUELA Light Modifiers

Open Umbrellas, Umbrella Boxes, Softboxes,, Snoots, Barn Doors, Color Gels, Reflectors, Filters

PHOTOZUELA Disc Reflectors

Circular reflectors give you maximum surface area. Artificial lighting aside, the sun is still our original light source. It's free, reliable, and for our purposes, essentially unending. It's up to photographers to apply it as creatively as they wish. How expressive you wish to make it come to life is up to you. It can be softened, reflected, or both, among other formative approaches. Tame natural light. Get natural lighting effects without letting nature take control of your creativity.

Silver and Gold Only with Pouch

Circular 2-in-1
Ø 60cm, 23.6"
Code: CRF-2SG

Circular 2-in-1 CRF-2SG P340 ea.

TRANSLUCENT Gives a soft and diffused light.

Silver, Gold, Translucent, White, Black with Pouch

SILVER Highly reflective with high light output and gives a crisp light.

BLACK Reduces reflections and stray light. Also increases contrast when shooting under very soft light conditions.

Circular 5-in-1
Ø 60cm, 23.6"
Code: CRF-5M

Circular 5-in-1 CRF-5M P630 ea.

GOLD Highly reflective with high light output and gives a soft warm light.

Circular 5-in-1
Ø 80cm , 31.5"
Code: CRF-80

Circular 5-in-1 CRF-80 P775 ea.

WHITE Gives a soft even light output.

Continued on Next Page...

PHOTOZUELA

Light Modifiers

Open Umbrellas, Umbrella Boxes, Softboxes,, Snoots, Barn Doors, Color Gels, Reflectors, Filters

Silver, Gold, Translucent, White, Black with Pouch

Circular 5-in-1
Ø110cm, 43.3”
Code: CRF-110

Circular CRF-110 P990 ea.

Oval Silver, Gold, Translucent, White, Black with Pouch

Oval 5-in-1
80x120cm, 31.5” x 47.2”
Code: RFD-812

Oval 5-in-1 RFD-812 P1650 ea.

Oval 5-in-1
100x150cm, 39.4” x 59.1”
Code: RFD-1015

Oval 5-in-1 RFD-1015 P1980 ea.

Barn Door with Color Gels - Attaches to Standard Reflector
Code: BD-22M

Barn Door Set D-22M with Color Gels P990 ea.

ELINCHROM Mount Beauty Dish
White Reflector without Honeycomb
Ø 40.5cm, 15.9”
Code: EB-14M

Elinchrom Beauty Dish EB-14M P1540 ea.

Honey Comb for Beauty Dish EB-14M
Code: EB-14HC

Honeycomb for Beauty Dish EB-14HC P1320 ea.

ELINCHROM Mount Snoot with Detachable Honey Comb Filter
Code: ES-2M

Elinchrom Snoot ES-2M P665 ea.

ELINCHROM Mount Standard Reflector
with Umbrella Hole
Ø 19cm, 7.5”
Code: ER-8M

Elinchrom Reflector ER-8M P610 ea.

Continuous Lights

Bianco Luce 330 Code: BL-330CF

Bianco Luce 600D Code: BL-S600LD

Bianco Luce 1200D Code: BL-S1200LD

Quarzo Luce Code: QL-1000

Testa Rossa Code: BFL-800

Testa Gialla Code: BHL-2000

Spares

Spare Lamp for Bianco Luce 330 Code: CFL-55CS
Spare Lamp for Quarzo Luce Code: QB-1k
Spare Lamp for Testa Rossa Code: HTR-25LM
Spare Lamp for Testa Gialla Code: HTR-425LM

Other Spares

Spare Lamp for CFL-255K and Bianco Luce 330 Code: CFL-85CS
Spare Lamp for DVQ-500K Code: QB-500
Spare Lamp for DVS-800K Code: HTR-18LM

Continuous lights are the first thing that come to mind whenever a video or product shoot is in play. Continuous lights provides the necessary supplemental light source to help ensure the most accurate results. Fluorescent and halogen lighting makes studio photography and cinematography simple and easy because it is a WYSIWIG (what you see is what you get) light source. You will find here halogen and fluorescent studio lighting that will perform according to your production needs and soon studio LED lighting and more variations of the Bianco Luce 330 - BL-330CF.

PHOTOZUELA Bianco Luce 330 Code: BL-330CF

Features:

- Sturdy and Professional Aluminum Box Frame, Matte Finish with Front Aluminum Shield/Reflector
- Easy to Assemble/Disassemble 60x60 Softbox
- Ceramic E27 Lamp Sockets
- 2 Switches to Control Power Output to 3 Bulbs Per Switch (Half and Full)
- Each 55W CFL Lamp is Equivalent to 250W of Filament Bulb, Flicker-free
- Up to 21000 Lumens Combined 6 Lamps, Up to 8,000 Hours Lamp Life
- CRI (Color Rendition Index) of 84
- 5500K Color Temperature, Color Balanced
- *Can be Placed on the Floor without A Light Stand for Low Level Illumination*

6 Months Service Warranty

Bianco Luce 330 BL-330CF with 6pcs 55W CFL Bulbs CFL-55CS P6688 ea.

55 Watts Photographic CFL Lamp CFL-55CS P550 ea.

• **Light Stand NOT INCLUDED**

* **Protected by a 6 Month Service Warranty** (Please refer to our TERMS)
* **CFL** Bulbs DO NOT carry any warranty. Please trust that we test them before shipping.
* Available only as single order without light stand.

PHOTOZUELA Quarzo Luce Code: QL-1000

Each of the housing units are equipped with a strong air exhaust blower with heat dissipation spacer offering uncompromised lighting for TV and DV filming. It is also perfect for wedding and ambient lighting in photography.

Because of the included diffusion umbrella, it may also be used for green screen Chroma key applications both in video and stills. Quartz-halogen lights are an alternative to flash heads for studio photography. QL-1000 employs Bowens Mount.

One of the most common problems in flash photography is finding out after you look at pictures taken that the flash units created unwanted shadows. This doesn't happen with quartz-halogen lights. These lights are on while you are composing a picture, so you see the exact effect the lighting has on your subject. This is a big advantage for a lot of photographers.

Features:

- Step less Light Intensity Adjustment up to 1000 Watts*, 25000 lm
- Model Light Function, P3 Technology, Extends Lifetime (for Philips Lamp)
- No Optical Parallax
- Color Temperature: 3200 K
- Cooling Method: Cooling Fan, Thermal Isolation Base, Radiator
- Operating Voltage: AC 220V

Each QL-1000 Includes A 9' Light Stand and A 36" Dual Duty Umbrella Code: UM-36DP with Standard Bowens Reflector

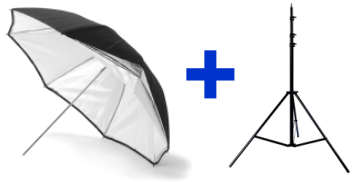

Caution—High Temperature Lamp: When using the umbrella, NEVER place it too close to the lamp.

Flexible 1/4" and 3/4" Light Stand Spigot can be Placed Vertically or Horizontally. Spigot Included.

SINGLE QUARZO LUCE QL-1000 PHILIPS 1000Watts Quartz Light w/ Heavy Duty Light stand and 36" Detachable Umbrella

P6520 ea.

1000 Watts PHILIPS Quartz Lamp QB-1K

P1990 ea.

What's Included / Specifications:

1pcs Quartz Light Control Unit Bowens S-Type
1pcs 1000 Watts PHILIPS 6995P Quartz Halogen Lamp Code: QB-1K
1pcs Bowens S-Type Mount Reflector
1pcs Fused British Plug with 5m Power Cord, Socket Adaptor Included
1pc Light Stands Code: SS-T280

Segments: 4
Max. Height: 2800mm, 9 feet
w/ 1/4 and 3/8 Spigot, Vertical and Horizontal Placement
Operation Manual

- **Adaptor Included**

* **Protected by a 6 Month Service Warranty** (Please refer to our TERMS)
* Bulbs DO NOT carry any warranty. Please trust that we test them before shipping.
* Available as a single order with stand included and umbrella. Packaged in Carton
* Carry bag sold separately.

WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician. **NEVER install bulbs higher than 1000 Watts.**

PHOTOZUELA Testa Rossa Code: BFL-800, BFL-800K (Kit)

Available in BFL-800K (Kit) and BFL-800 (Single). The Testa Rossa BFL-800 is also widely known as The Redhead, with a combined 2400 Watts of power (Kit) and a color temperature 3200K, this product is ideal for lighting on stage, conference room, large studio, in the field, SLR and DSLR photography and film. Each housing has an 800W halogen tube which can illuminate a large area indoors and outdoors. You can control the focus of the beam using the large dial on its back end for precise focus. Also Available in single purchase with stand. These lights can be used as a key flood light for large areas and are also useful as fill and backlights.

Included in the Testa Rossa BFL-800K Kit:

3 Head Units Code: BFL-800
Power: AC 220V, 800W *
Adjustable Focus Knob: Rear
Barn Door / Scrim: Included

3 Halogen Tubes Code: HTR-25LM
Luminous Flux: 25000 lm

3 Light Stands Code: SS-T280
Segments: 4
Max. Height: 2800mm, 9 feet
w/ 1/4 and 3/8 Spigot, Vertical and Horizontal Placement

1 Four-Leaf Barn Door Assembly
1 Scrim
1 Black, Rolling Nylon Case
Fused British Power Plug
1 Included Grounded Socket Adapter
Includes In-line Master Switch
User Manual
Packed in Carton
6 Months Service Warranty

Limited Stock
PROMO KIT
BFL-800K Kit w/ Rolling Semi-Hard Case
Exclusive Only for This Kit
P19000
ea. kit

SINGLE
Testa Rossa
BFL-800 SINGLE
w/ Light Stand SS-T280
P5718
ea.

800 Watts
Halogen Tube
HTR-25LM
P590
ea.

Flexible 1/4" and 3/4" Spigot can be Placed Vertically or Horizontally. Spigot

- **Light Stand INCLUDED**

* **Protected by a 6 Month Service Warranty on Focus Assembly Only** (Please refer to our TERMS)
* Lamps DO NOT carry any warranty. Please trust that we test them before shipping.
* Available as a kit or single order with stand included Packaged in Carton
* Carry Bag NOT Sold Separately

- Adaptor Included

WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician.

PHOTOZUELA Testa Gialla Code: BHL-2000

Only available as single, non-kit version with light stand, the BHL-2000 is widely known as The Yellow Head or Blonde. with a very powerful, 2000 Watts, large diameter reflector which greatly increases your lighting real estate and the same color temperature as the BFL-800 Testa Rossa of 3200K, this is ideal for lighting on stage, a larger studio, in the field. Each housing has a 2000W halogen tube which can illuminate an even larger area indoors and outdoors. You can control the focus of the beam using the large blue Bakelite dial under the back end for precise focus.

Included with the Testa Gialla BHL-2000:

1 Head Unit Code: BHL-2000
- Power: AC 220V, 2000W *
- Adjustable Focus Knob: Rear Bottom
- Large Reflector Diameter 9.7" with Barn Door: Included

1 Halogen Tube Code: HTG-425LM
- Luminous Flux: 42500 lm

1 Light Stand Code: SS-T280
- Segments: 4
- Max. Height: 2800mm, 9 feet
- w/ 1/4 and 3/8 Spigot, Vertical and Horizontal Placement

1 Four-Leaf Barn Door
1 Scrim
1 Rolling Semi-Hard Nylon Case
Fused British Power Plug w/ Adaptor
Includes In-line Master Switch
User Manual
Packaged in Carton
6 Months Service Warranty

Flexible 1/4" and 3/4" Spigot can be Placed Vertically or Horizontally. Spigot Included.

• **Light Stand INCLUDED**

Testa Gialla BFL-2000 SINGLE w/ Light Stand S
P 9540
ea.

• Adaptor Included

* **Protected by a 6 Month Service Warranty on Focus Assembly Only** (Please refer to our TERMS)
* Lamps DO NOT carry any warranty. Please trust that we test them before shipping.
* Available as a kit or single order with stand included Packaged in Carton
* Carry Bag NOT Sold Separately

2000 Watts Halogen Lamp HTR-425LM
P 1800
ea.

WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician.

Studio Accessories

Backdrop Stand and Crossbar Kit Code: BST-300

Non-woven Backdrops 3m x 6m
- **Black** Code NW-36BK
- **Grey** Code: NW-36GY
- **White** Code: NW-36WT
- **Green** Code: NW-36GR

Photo / Still Life Shooting Tables
- **Small model: PT-512 50x120cm** Code: PT-512
- **Large model: PT-1020 100x200cm** Code: PT-1020

Godox Speedlight Holder Code: SH-12E

Studio Flash Wireless Triggers
- 4-Channel Trigger/Receiver DC Canon/Nikon Code: FTU-4B
- 4-Channel Trigger/Receiver DC for Sony Code: FTS-4B
- 4-Channel AC/DC Set Code: TRIG-4TR
- 4-Channel AC Extra Receiver Code: TRIG-4R

Elinchrom to Bowens Adaptor Code: RA-1EB

Hot Shoe Adaptor for Sync Cords Code: HS-A2

Equipment Bag Code: EB-40B

PHOTOZUELA

Backdrop Stand and Crossbar Kit Code: BST-300

Our backdrop frame have been improved from our previous model. From the telescopic "Twist-Lock" per segment crossbar to the heavy duty light stands to support more weight for whatever you might want to hang as your background. We now have a bigger and better carry case to support all the aluminum.

Backdrop Stand Kit and Carry Bag BST-300
P4980
ea. kit

SPECIFICATIONS:
Retractable Background Stand
Max. Height: 260cm, 8.53'
Folded Height: 97cm
Bar Segments: 3
Bar Length: 300cm, 3 Meters
One Segment length: 100cm
Bar Material: Aluminum

- **Twist-Lock Mechanism Built Into The Crossbar**

PHOTOZUELA Non-woven Backdrops

Large, canvas backdrops available in black, grey, white, and green. There is one size available of 3 meters horizontal and 6 meters vertical (Approx. 10x20feet). Can be soaked in warm water with mild detergent or hosed down for cleaning (do not machine wash).

SPECIFICATIONS:

Non-woven, Cotton and Polyester, 3m x 6m (Approx. 10ft x 20ft)

NW-36BK P2100 ea.
Black
Code: NW-36BK

NW-36GY P2100 ea.
Grey
Code: NW-36GY

NW-36WT P2100 ea.
White
Code: NW-36WT

NW-36GR P2100 ea.
Green
Code: NW-36GR

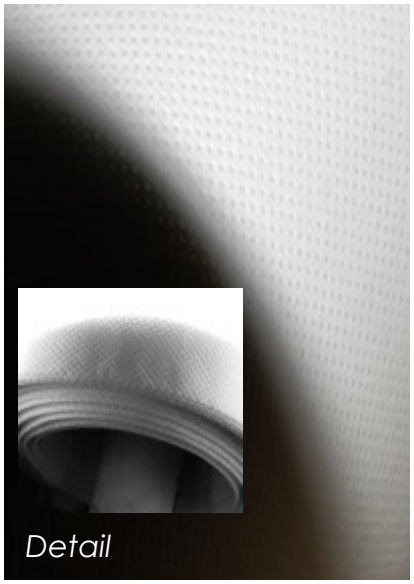

PHOTOZUELA

Metal Backdrop Clamps with Rubber Teeth

Code: MC-25 Spring lever, sturdy, metal clamps for backdrops and anything else you could imagine its use. Each comes with rubber sleeves.

Metal Backdrop Clamp MC-25 P165 ea.

PHOTOZUELA

Elinchrom to Bowens Mount Adaptor Code: RA-1EB

If you have existing Bowens S-Type Mount light modifiers, you may utilize this to fit them with our Elinchrom mount devices.

Elinchrom to Bowens Adaptor RA-1EB P1430 ea.

Hot Shoe PC Sync Adaptor HS-A2 P440 ea.

PHOTOZUELA

Hot Shoe PC Sync Adaptor Code: HS-A2 *w/ TTL Pass Through*

Mounts to your hot shoe and connects to your studio flash via sync cable for stationary situations such as photo booth applications.

PHOTOZUELA

Equipment Bag Code: EB-40B

Equipment Bag Constructed of sturdy nylon and padding with side pockets as well as light stand compartments. It is equipped with a pull handle with wheels.

Size:

L 70cm x W 30cm x D 30cm

Equipment Bag EB-40B LWD 70x30x30 P3300 ea.

PHOTOZUELA

Photo / Still Life Shooting Tables

Do you sell products online? Ever wanted to get those nice background diffused product photos and reflective surface shots? Here's a mainstay if you're in the e-commerce trading business.

Shooting Tables are designed for small and middle product setups, allowing the non-reflective translucent Plexiglas to be lit from above, below, behind, or around the subject for dramatic or high-key lighting with precise control.

Our Still Life Photo Tables Come in two Sizes:

Small model: **PT-512 50x120cm** (Table Area)

Large model: **PT-1020 100x200cm** (Table Area)

What's Included / Specifications:

Composed of Lightweight Aluminum Frame

180° and 90° Recline

Non-reflective opaque Plexiglas surface Base (Reversible for Reflective)

8 Rubberized clamps

2 C-Clamps (with spigot and thread)

1 Carrying case

Assembly Instructions

PT-512 50x120cm P3850 ea.

PT-1020 100x120cm P6740 ea.

Godox Speedlight Holder - Place any device like speed lights, Microphones,

Portable Recording devices, transmit and receive devices; and many more using hot shoe or threads atop and on the end of light stands and booms. A very compact holder with 1/4" and 3/8" mounting thread.

Holder For Most Speed lights and other devices SH-12E P475 ea.

To complete your **strobist setup**, don't forget to add: Montana C600 Speedlight, Light Stand SS-32S, UM-33RS or UM-33T Umbrellas, Reemix 3-in-1

PHOTOZUELA

Studio Flash Wireless Triggers

4-Channel Trigger and Receiver DC

Code: FTU-4B or FTS-4B

Specifications: ALL Battery Operated

Power: 2xAA Receiver, 1x12V 23A Transmitter
Channel: 4, 433Mhz
Sync Cord: Ø6.35/Ø3.5
Outdoor operation distance:≥20-30M
Indoor operation distance:≥20M
Sync speed:1/200s
User Manual
Receiver Batteries Not Included
3 Months Service Warranty

Battery Operated Set FTU-4B P835 ea.

For **Nikon, Canon, most brands 4-Channel Code: FTU-4B**

DC For Sony FTS-4B P835 ea.

For **Sony 4-Channel Code:: FTS-4B**

4-Channel Trigger and Receiver AC

Code: TRIG-4TR and TRIG-4R

Specifications:

Power: Receiver 220VAC, Transmitter 1x12V 23A
Channel: 4, 433Mhz
Sync Cord: Ø6.35/Ø3.5
Outdoor operation distance:≥20-30M
Indoor operation distance:≥20M
Syncspeed:1/200s
User Manual
3 Months Service Warranty

Trigger and Receiver Set TRIG-4TR P1040 ea.

Additional Receiver Only TRIG-4R P595 ea.

Receiver Transmitter

Adaptors, Short Sync Cable Included for all Models

*** Ask about our overstock flash triggers at low prices**

On-The-Go

Godox Monix EX Series Portable Outdoor Flash

Godox EX-400
Godox EXR-400

Godox Monix LUX Series Portable Outdoor Flash

Godox LUX-400

Godox EX / LUX Series Accessories

Softbox 60x60cm Code: EX6060
Softbox Octabox 80cm Code: EX-80

Extras

Spare Battery for EX and LUX Series Code: E3000
Replacement Ring Flash Tube Code: FT-14
Replacement Modeling Lamp Code: ML-03

Godox Monix EX and LUX Series Portable Outdoor Flash

Designed for professional outdoor shooting, it features fast recycle time, less than 1.8s at full power. A clear digital LED screen shows 9 steps precise output controlled by CPU. The change in aperture is less than 0.1 when your light meter is set at 1/60s and 1/500s. More than 180 times full power flashes. Battery recharging is safe and stable which can be done both ways, car cigarette lighter and outlet charger.

Compared to traditional outdoor portable flash, its reflector can be dismantled from the flash head enabling you to use accessories like softbox*, barn door**, and snoot** which offers versatility just like shooting inside the studio. It is equipped with an umbrella holder built into the handle. Moreover, the handle is also capable of mounting onto studio light stands, a boom, or tripods with its thread on its bottom - equipped with a two-finger release knob*** for easy attachment and removal.

The EX and LUX Series is equipped with a set of wireless receiver and transmitter modules for your convenience. Additionally, a diffuser soft cap is also included so you can have control with the quality of light.

The flash has a hard, protective plastic cover**** to safeguard the flash tube and modeling bulb. A shoulder strap and soft carry bag is also included for ease in mobility. All EX and LUX Series come with a sleek, professional, padded hard aluminum case to give you that added peace of mind and cool factor.

Continued next page...

* We offer a 60x60cm Softbox and 80cm octa box.
** Barn door and snoot are pending accessories we will carry in future offerings. However, you may purchase in other stores. Look for attachments that are 'Bowens' mount compatible.
.*** EX and LUX Series only.
**** Hard protective plastic cover only available for EX and EXR models

We offer EX and LUX Series of portable outdoor flash in 3 variants:

The Standard Godox Monix EX400 GN52

Contains the most basic elements for you to perform top notch on location shoots.

SPECIFICATIONS:
Max power Output: **400Ws**
Guide Number: **52 (ISO 100)**
Power variation: 9 steps
Modeling Lamp: 12V 20W
Recycle Time (Full Light): 1.8s
Illumination Angle: 65°
Rated voltage of the Charger: AC 100V-240V 50/60HZ
Battery: Rechargeable 3000mAh Ni-MH
Battery Charge Mode: AC Outlet /Automobile 12VDC
Battery Loading & Unloading: Built-in (replaceable)

Monix EX400
P17299
ea.

What's Included?
1 Flash head with handle (mountable to hot shoe, tripod or light stand)
1 Power pack
1 Battery pack
1 AC Charger
1 Wireless remote trigger RT-02
1 Padded, Aluminum case (Dark Gray)
1 Translucent Diffuser Cap
1 Sync cord
1 1.5-meter power cord
1 Vehicle cigarette lighter cord
1 Power pack bag
User Manual
3 Months Service Warranty

Spare Battery Pack E3000
P3500
ea.

(flash mountable onto light stands with standard spigot)

The Ring Flash Godox Monix EXR400 GN68

Aside from having a ring flash, it provides advanced features such as higher guide number than the EX400 and a camera stand. The large diameter hole allows you to mount almost all types of cameras and lens size.

If you need a flash that hardly produces shadows, this is your best choice. Another plus is that The Monix EXR400 creates fantastic lighting effects most especially for wedding ceremonies (creates a glamorous catch light), and large scale venues. There are no interference by nearby colors and creates perfect lighting under a gold and yellow background.

SPECIFICATIONS:

Max power Output: **400Ws**
Guide Number: **68 (ISO 100)**
Power variation: 9 steps
Modeling Lamp: 12V 20W
Recycle Time (Full Light): **2.5s***
Illumination Angle: 65°
Rated voltage of the Charger: AC 100V-240V 50/60HZ
Battery: Rechargeable 3000mAh Ni-MH
Battery Charge Mode: AC Outlet / Automobile 12VDC
Battery Loading & Unloading: Built-in (replaceable)

Monix EXR400
P25500
ea.

(flash mountable onto light stands with standard spigot)

Spare Battery Pack E3000
P3500
ea.

What's Included?

1 Ring Flash head with handle (tripod or light stand)
1 Power pack
1 Battery pack
1 AC Charger
1 Wireless remote trigger RT-02
1 Aluminum case (Dark Gray)
1 Translucent Diffuser Cap (for ring)
1 Sync cord
1 1.5-meter power cord
1 Vehicle cigarette lighter cord
1 Camera Stand / Mounting Bracket
1 Power pack bag
User Manual
3 Months Service Warranty

* Extended recycle time due to large ring flash diameter.

The Best of Both Worlds Godox Monix LUX400

GN52 GN68

This set combines both features of The EX400 and The EXR400. What's left is up to your imagination!

(flash mountable onto light stands with standard spigot)

Monix LUX400
P31540
ea.

Specifications:

Max power Output: **400Ws**
Guide Number: **52 standard / 68 Ring Flash (ISO 100)**
Power variation: 9 steps
Modeling Lamp: 12V 20Ws
Recycle Time (Full Light): **1.8s Standard / 2.5s Ring Flash**
Illumination Angle: 65°
Rated voltage of the Charger: AC 100V-240V 50/60HZ
Battery: Rechargeable 3000mAh Ni-MH
Battery Charge Mode: AC Outlet / Automobile 12VDC
Battery Loading & Unloading: Built-in (replaceable)

What's Included?

1 Flash head with handle (mountable to hot shoe, tripod or light stand)
1 Ring Flash Head with Handle
1 Power pack
1 Battery pack
1 AC Charger
1 Wireless remote trigger RT-02
1 Padded, Aluminum case (Dark Gray)
1 Translucent Diffuser Cap
1 Sync cord
1 1.5-meter power cord
1 Vehicle cigarette lighter cord
1 Camera Stand / Mounting Bracket
1 Power pack bag
User Manual
3 Months Service Warranty

Spare Battery Pack E3000
P3500
ea.

Godox EX / LUX Series Accessories and Spares

To enhance your shooting experience and convenience, we offer the following light control accessories and spares for your portable flash. Your EX and LUX Series flash head accepts 'Bowens' mount compatible attachments, so you don't have to worry about availability.

Model EX80 Octa Box
Ø 80cm

Accessory EX80 Octa Box **P2150** ea.

Model EX6060 Softbox
60x60cm

Accessory EX6060 Softbox **P1850** ea.

Spare EX Modeling Lamp
12V 25W

Generic Modeling Lamp EX125V **P250** ea.

Spare EX Flash Tube Model FT12
400Ws

Generic EX Flash Tube FT12 **P1750** ea.

Spare EXR Flash Tube Model FT14
400Ws

Generic EXR Flash Tube FT14 **P2850** ea.

Godox EX / EXR / LUX Series Photos and Diagrams

Power Pack Top Panel

Quality Aluminum Case

Equipped with Umbrella Holder

EX Series

EXR Series

AC Charger

Sync Cable

Translucent Cap

Car Cigarette Plug

Flash Tube Protector

EX Series Flash (Cover off)

EX Series Flash (Back View)

Reflector

Portable Power

Godox Propac PB820 Power Source

For Nikon Flashgun

For Canon Speedlight

Godox Leadpower LP-750 Portable Power Inverter

Godox Leadpower LP-750 Spare Battery LP-9000

Godox Propac PB820 Power Source For Speedlight

Need that extra power and fast recycle time for your off-camera flash—events photography? The Professional Propac PB820 is your answer! Get up to *Up to 250-320 full-power flashes with Canon and Nikon flashes! This is the perfect tool to have in your camera bag for an all day photo-shoot such as weddings and company parties, graduations, community events and others. You can even charge it in your car en route to the event. There must be batteries inside your flash even if they are drained out for the PB820 to work, since it uses those batteries as a bridge to supply power to your speed light.

Propac PB820
P5280
ea.

More Details:

Remaining Power Indicator: 4-LED power display tells you exactly how much power remains. **Low Power Indicator:** Green LED light flickers when power gets low and a charging indicator gives the charge status. **Safe and Reliable Protection:** Protected against overheating, high voltage, low voltage and overuse. The Propac PB820 employs advanced circuitry to protect both user and your device. **Compact and Slim Design:** With a slim, comfortable and portable case (belt clips and strap loops included). It is easy to transport and fits right in you camera bag.

Specifications:

Battery: Ni-MH 9.6V, 2000mAh
Charging Time: Approx. 2 Hours
Cycling Time: within 1s
Dimensions: 6.1x4x1.7"

CHOOSE ONE

Canon (Cx)

Nikon (Nx)

What's Included?

1 Propac PB820 with Belt Clip
1 AC Charger
1 Car Charger
1 Flash Power Connector (Choose from Canon or Nikon)
1 Shoulder Strap
User Manual, **3 Months Service Warranty**

Compatibility: Canon 580EXII, 580EX, 550EX, 430EZ, 540EZ
Nikon SB800, SB900, SB28 Euro, SB28DX, SB80DX

* 250-320 full-power flashes tested with high-end Canon 580EXII and Nikon SB-900.

Godox Leadpower LP-750 Portable Inverter

Are you ready to take your existing monolight setup outdoors? Bring the power of the electrical grid on location with the Leadpower LP-750! The Godox Leadpower LP-750 is a battery pack with a pure sine wave inverter, designed for use with studio lights. It can power laptops, digital cameras and wide for many outdoor activities. Leadpower LP-750 makes AC power possible wherever your carry of other electronic equipment as well. The LP-750 is an indispensable back-up power supply creativity takes
you.

Features:

Novel Structure and Portable Size:
It consists of a built-in battery of 2.2kg supporting fast replacement and a body of 3.4kg, easy to carry.

Powerful as a Mini Generator:
The battery *supports strobes of up to 3000Ws* (recycle time of 2s) which can meet the outdoor shooting requirement for large-power strobe light. The special high-quality 9000mAH NiMH battery pack sustains strobe lights of 600Ws to flash 380 times in full power.

Safe and Reliable, Multiple Protection:
The Leadpower is protected against overload, short circuit, high-voltage input, overheating, and inverse connection of anode and cathode to avoid electrical hazard.

Easy to operate, professional:
Install the battery into the battery box, turn on the power switch, and then insert the power cord of your equipment into the socket on battery box

Easy to charge:
It supports AC charging, car cigarette socket charging, or 10 to 15V DC external charging by a car battery or storage battery via a battery connector

Leadpower LP-750
P31000
ea.

Extra Battery LP-9000
P7300
ea.

Specifications:
Continuous Output: 750W*
Peak Power: 1400W
Output Voltage/Frequency: 230V/50Hz
Output Waveform: Pure Sine Wave
High Dynamic Distortion: 3%
Current Consumption: Normal Mode: 0.25A/Flash Mode: 1A
Conversion Efficiency: 91%
Low-Voltage Alarm: Yes
Low-Voltage Shutdown: Yes
Storage Temperature Range: -30°C – 70°C
Operating Temperature Range: 0 – 40°C
Battery Type / Capacity: NiMH/9000mAh
Normal Capacity of Battery: 9000mAh
Charging Period: About 6 Hours (Standard 1.7A Charger)
Power Outlets: Three (3) Universal Type CE 230V
Fuse: 6x30A Changeable (3x30A for External Connection; 3x30A for Actual Device)
Weight: Approx. 8.2kg with Accessories and Packaging

What's Included:
1 LEADPOWER LP-750 Portable Inverter
1 9000mAh Ni-MH Rechargeable Battery LP-9000
1 AC Charger
1 Car Charger
1 1.5m Power Cable
1 Water Proof Carrying Bag
4 Screws for Cathode and Anode Terminals
User Manual
6 Months Service Warranty

Camera Accessories

Godox Reemix 3-in-1 Remote
- For Nikon
- For Canon

Godox Lens Caps
- Ø 58mm
- Ø 67mm
- Ø 72mm
- Ø 77mm

Godox Lens Hood
- HB-39 for Nikon
- HB-35 for Nikon
- HB-32 for Nikon
- ES-71/II for Canon
- EW-83E for Canon
- EW-73B for Canon
- EW-60C for Canon
- EW-78D for Canon

Godox Flash Diffusers
- DF-900
- DF-680
- DF-430
- DF-580

Godox ThinkLite Speedlight
- model: TT560

Godox Ring48 LED Macro Light

Godox Reemix 3-in-1 Remote Control RMI - The Reemix Remote is more than just another flash trigger. It has three functions: **TRIGGER STUDIO STROBE**. Connect Reemix with your studio flash to trigger synchronously. It has multiple channels that enable you to trigger more than one strobe at a time. **CONTROL FLASH SPEEDLIGHT**. You can wirelessly control your off-camera flash gun. **RELEASE CAMERA SHUTTER**. You can set your camera in correspondence mode. It is possible to release your camera shutter in auto-focus, single and continuous shot, bulb and delay from a distance.

Available for most models of Canon and Nikon only. Additional receivers are available for purchase.

Reemix Remote Set RMI
P1450
ea. set

Additional Receiver RMI-R
P920
ea.

Specifications:
Transmit Frequency: 433MHz
Workable Range: 100m for Camera, 30m for Flash
Channels: 16
Transmitter Battery: 12V 1xA23
Receiver Battery: 1.5V 2xAAA
Sync Speed: Up to 1/250s

To complete your **strobist setup**, don't forget to add: Montana C600 Speedlight, Light Stand SS-32S, UM-33RS or UM-33T Umbrellas, SH-12E Holder.

What's Included?
1 Transmitter
1 Receiver
1 Sync Cable (Choose from above: ***C1, C3, N1, N2, N3*** left to right)
1 12V A23 Battery
User Manual
3 Months Service Warranty



Verify your SLR Connector

Compatible with:

C1: **Pentax** K100D,K110D, K10D, *ist Ds2, *ist D, *ist Ds, *ist, *istDL, *ist DL2. **Samsung** GX-1L, GX-1S, GX-10. **Canon** EOS 30, 33, 50E, 300, 300V, 3000, 50, 300D, 350D, 400D, 450D, 500D, 550D, 600D, 1000D, 1100D. ***C3:*** **Canon** EOS 1Ds Mark II, 1Ds Mark III, 1Ds, 1D Mark IV, 1D Mark II, 1D Mark II N, 1D Mark III, 5D Mark II, 1D, 5D, 7D, 50D, 60D, 40D, 30D, 20D, 10D, D60, D30, D2000, 1v HS, 1v, 3. ***N1:*** **Nikon** D2H, D2Hs, D1x, D1h, D1, D2x, D2Xs, D200, D300, D3, D3X, D3S, D2HS, D300S, D700, F5, F6, F100, F90, F90x, D100 (MB-D100 needed), **Kodak** DCS-14n, **Fujifilm Finepix** S3pro, S5pro. ***N2:*** **Nikon** D70S, D80. ***N3:*** D90, D3000, D3100, D5000, D5100, D7000.

Godox Lens Caps - Indispensable for protecting the front element and or glass, screw-in filter of your lens from smudges, dust, and everyday transport.

No front label. Canon lens cap style. Works on all other major brands.

Available Sizes/Code:
LC-58, Ø 58mm
LC-67, Ø 67mm
LC-72, Ø 72mm
LC-77, Ø 77mm

ALL Lens Caps P90 ea.

Godox Lens Hoods - A lens hood lets you take better pictures. It extends beyond the edge of your lens, shading it and reducing light interference that causes glare. It also serves as protection for your valuable lens and glass filter, since it extends beyond the lens surface, shielding it from debris, moisture, bumps, and even fingerprint smudges.

ALL Lens Hoods. P230 ea.

Available for the following lens:

LH-HB39 for Nikon
AF-S DX 16-85mm

LH-HB35 for Nikon
AF-S DX 18-200mm f/3.5-5.6G ED IF VR

LH-HB32 for Nikon
AF-S DX 18-70mm f/3.5-4.5G ED IF
AF-S DX 18-105mm f/3.5-5.6 VR ED
AF-S DX 18-135mm f/3.5-5.6G ED IF

LH-ES71II for Canon
EF 50mm f/1.4 USM

LH-EW83E for Canon
EF 16-35mm f/2.8L II USM
EF 20-35 f/3.5-4.5 USM
EF 17-40mm f/4L USM
EF 17-35mm f/2.8L USM
EF-S 10-22mm f/3.5-4.5 USM

LH-EW60C for Canon
EF-S 18-55mm f/3.5-5.6 I, II IS
EF 28-80mm f/3.5-5.6 II, II USM, III, IV, V
EF 28-90mm f/4.0-5.6

LH-EW78D for Canon
EF-S 18-200mm f/3.5-5.6 IS
EF 28-200mm f/3.5-5.6

LH-EW73B for Canon
EF-S 17-85mm f/4.5-5.6 IS USM
EF-S 18-135mm f/3.5-5.6 IS

Please match your lens and speed light model specifications to the model code.

Godox Flash Diffusers - Flash diffusers for off-camera flash. Get rid of the harsh contrast and shadows created by bare flash. Soften, and evenly distribute the light across the entire frame* and create a flattering look for your subjects. Perfect for portrait shots, macros and more. Just slides into your flash with ease and fits anywhere in your camera bag.

ALL Flash Diffusers P200 ea.

* Available for the following hot shoe flash and other third party brands.

For Nikon SB-600 / SB-800, Nissin Di466, Olympus FL-36, DMW-FL360E, Sunpak PZ42X, Yongnuo YN-460, YN-460II, YN-465, YN-467

For Nikon SB-900

For Canon 430EX / 430EXII

For Canon 580EX / 580EXII, Montana C600, Nissin Di622, 360TXP, 360TW, PZ400-C-N

* Requires bouncing of light indoors to achieve.
Flash units shown for illustration only.

PHOTOZUELA Speedlight Montana C600 Code: C600

This feature rich Speedlight competes directly with other manual, off-camera flash units. This is the speed light you need when you just have to get that shoot done, and then some more without breaking the bank. With slave function, it can act as an additional studio flash – handheld or on a light stand. Off-camera flash is perfect for when your DSLR's built-in flash just isn't powerful enough, when you want to be more creative and flexible, bouncing light off other objects or when you just have a large diameter lens mounted to avoid lens (hood) shadows.

Added features not found in other brands!

- Powerful Guide Number 38
- Features a power port to attach power packs for extended use
- Features a PC Sync Port for triggering with wireless remotes or used in tandem with studio flash
- Metal Shoe Terminal (not plastic)
- Free Flash Diffuser

Montana C600 Speedlight w/ Free Diffuser Cap Code: C600
P2500 ea.

Specifications:
Guide number : 38 (ISO 100)
Sync and Power Socket
Flash mode : M – Manual, S1 – Optical Slave, S2 – Optical Slave Preflash
Vertical rotation angle : 0-90 degrees
Horizontal rotation angle : 0-270 degrees
Power : 4xAA batteries (Alkaline or Ni-MH)
Lighting times 100-1500 times (AA Alkaline batteries)
Recycle time : approx. 0.5-5s (AA Alkaline batteries)
Consistent Flash Output: 1/128, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2, 1/1
Color temperature 5600K±200K
Flash duration 1/1800s-1/2000s
Other: Equipped with Optical Receiver for Slave Function, Comes with Pull-Out Reflector and Diffuser

Compatibility: Standard Hot Shoe Canon, Nikon, Pentax, Olympus
Dimensions : 7.5x3x2.1"
Net weight : 285g
Batteries Not Included
3 Months Warranty

What's Included?
1 Montana C600 Unit
1 Flash Diffuser Cap
1 Soft Pouch
1 Mini Stand
User Manual

Godox Macro LED Ring Light Ring48

Powered by 48 pieces of white (color balanced) LED lights, it is effective for macro photography (close-up shooting) and portraiture. It emits a constant stream of light providing permanent lighting for your subject and enabling easy exposure handling. The ring light can be switched for 1/2 right, left, top or down creating different lighting effects. It includes 6 lens thread adapter rings of different diameter for mounting on most lens brands. Additionally, it is possible to create a ring around the eye area of your subject for a more glamorous look. ***The batteries are stored inside the hot shoe mounted device to avoid any weight stress to the front lens barrel assembly. It can be powered through batteries or with the included AC/DC adapter.***

Ring48
P2490 ea.

Specifications:
Effective Distance: 3cm-100cm
Service Time: 1.5 Hours Using 2AA Ni-MH, 5W
LED Index: (at full power) GN15
Color Temperature: 5500±6000K
Power Rate: Semi-Power / Full Power
Power Source: Battery or A/C
Coiled Cord Length: 100cm
Ring Adapter Sizes: 49, 52, 55, 58, 62, 67mm
Adapter: 100-240Vac
Shipping Weight: 185g
Batteries Not Included

What's Included?
1 Ring LED Head
1 A/C Adapter
6 Adapter Rings
1 Hot Shoe Power Controller / Battery Pack
User Manual
3 Months Service Warranty

LIMITED STOCKS AVAILABLE

How to Order

At this moment we mainly handle online sales. Visits are by appointment. This means that our staff will be more than happy to answer your questions and send you pictures and information about the products with as many details and explanations as you may need.

How to buy: You can browse the website, choose to "buy now" the products of your interest and these will be added to your "cart". When you are done you can roll over the top right "items" button and then click on "go to checkout". We offer the option to do manual payment or online payment and also the choice between pick up at our warehouse or delivery door-to-door through the couriers you see on this page. You can also call, SMS, or email us and our friendly sales staff will follow up your query. **Visits are by appointment only.**

Catalog prices are already the lowest possible price. No further discounts are available.

CASH – Clients can pay cash upon pick-up. Those who want to **pre-order need to pay 30% cash or bank deposit in advance**.

BANK DEPOSIT – You may deposit in our BPI, HSBC or BDO account. If a check payment is made, checks must be cleared first before items are delivered or retrieved.

***** *Current Account in **HSBC** to the name of* ***Analema Corporation*****, ACC # 026-080663-040**

***** *Saving Account in **BDO** bank to the name of* ***Analema Corporation*****, ACC # 506-800-2007**

* *Current Account in **BPI** to the name of* ***Analema Corporation ACC # 1921-1158-45***

CREDIT CARD – You may pay with your credit card via our website (Safe SSL Payment) or when you pick up your items without extra charge. All major credit cards are accepted.

PAYPAL™ – You may use your credit card and pay via paypal.com. This is one of the safest ways of paying in the internet. However, you will need to add 5% to the total amount you want to purchase for the PayPal fees. If you do not have a PayPal account, you must first register to their site. Afterwards, please pay the exact amount to our account: **analemacorp@gmail.com**. It will take 3-4 working days for PayPal payments to be cleared and before you may pick up or have your item shipped.

GLOBE® GCASH™ - You can make G-CASH payments through mobile number **0927-8484378**

About Photozuela Products

All of our products are brand new and do not contain hidden defects or extra charges. Prices include VAT. (Additionally, charges may be added on top of the retail price when the client opts for private courier delivery and such.)

All of our items are fully protected against manufacturer defects at the moment of purchase. We assure our clients that all our products have been tested and quality checked at the factory and upon receipt of the items in our warehouse.

Small imperfections such as tiny and almost unnoticeable scratches/irregularities in some of the parts are sometimes unavoidable during the manufacturing and shipment and may not be subject for refunds and or replacement as long as the product is in perfect working order. Hence, we invite every client to check for themselves (or call our staff to check for online orders) any irregularities in cosmetic appearance and function before checking out for your peace of mind.

Consumables such as flash tubes and light bulbs (including CFL bulbs) are tested for it's correct function before shipping and are never replaced.

Warranty

If an item is found factory defective, an outright replacement is granted within the first 3 days after purchase. After this, product servicing shall take place. We employ in-house quality tests before release, but we absolutely encourage our clients to test in-house and perform item counting on their purchase. (If client, for example, performs tests for items such as light stands, it must not be loaded by force; weight should be applied only for what the light stand or support is designed to bear. Client is liable for damages incurred should this be the case.)

In an event that a product of ours has been returned within the warranty or replacement period for any reason, an investigation of product fault shall take place. This is to protect and improve our future product design and specs. We only replace and or repair our products and never process a full refund as we act in full transparency with our clients that we do not carry items with hidden defects.

For customers purchasing in other regions via courier: we guarantee special care and full transparency that they will receive our products in full working order and fully quality checked before we release them for delivery to third party logistics companies. The client will be responsible for the insurance and normal risks involved during transport. Rest assured, we do stress detailed instructions regarding handling and packaging of our items with our partner courier. Should the client prefer to return a defective item after troubleshooting calls for it, they shall shoulder all expenses to return the item back to our warehouse for servicing. This is regardless if the product is within the warranty period or if it had lapsed.

Electronic items (excluding CFL bulbs) - service warranty covers free repair if it is confirmed by our technicians to be a factory defect. Warranty will be completely void if the user himself opens the units or allows a third party technician to do so. Clients may prefer do so only after service warranty have lapsed or the product EOL had been announced.

Not Included in warranty: Specific mechanical, textile, accessories, non-electronic and certain electrical items. Also, Peripheral items normally do not carry any warranty – (ex. diffuser cloth, bags, light stand, circular reflector, anything with no electronic or electrical component). Service warranty shall be specified in the product's page, in the receipt, our catalog, or as noted by our point of sales.

There is NO coverage for force majeure, abuse or misuse of the items. Examples of abuse and or misuse include, but are not limited to; liquid spillage, immersion, fall, unauthorized disassembly, scratches caused by wear and use, using a product not intended for commercial use, using the wrong replacement parts and such. All malfunctions resulting from misuse, misconfiguration, exposure to dust, humidity, dirt, sand, water, dropping or shock of any kind will not be covered by this warranty.

Items unclaimed after sixty (60) days will be forfeited.

** Product Design, specifications and prices may change without prior notice.*

YOU MAY SEND US AN EMAIL AT ***SUPPORT@PHOTOZUELA.COM*** *FOR MORE INFORMATION*

Click anywhere on this page to open our **Google Maps™** location

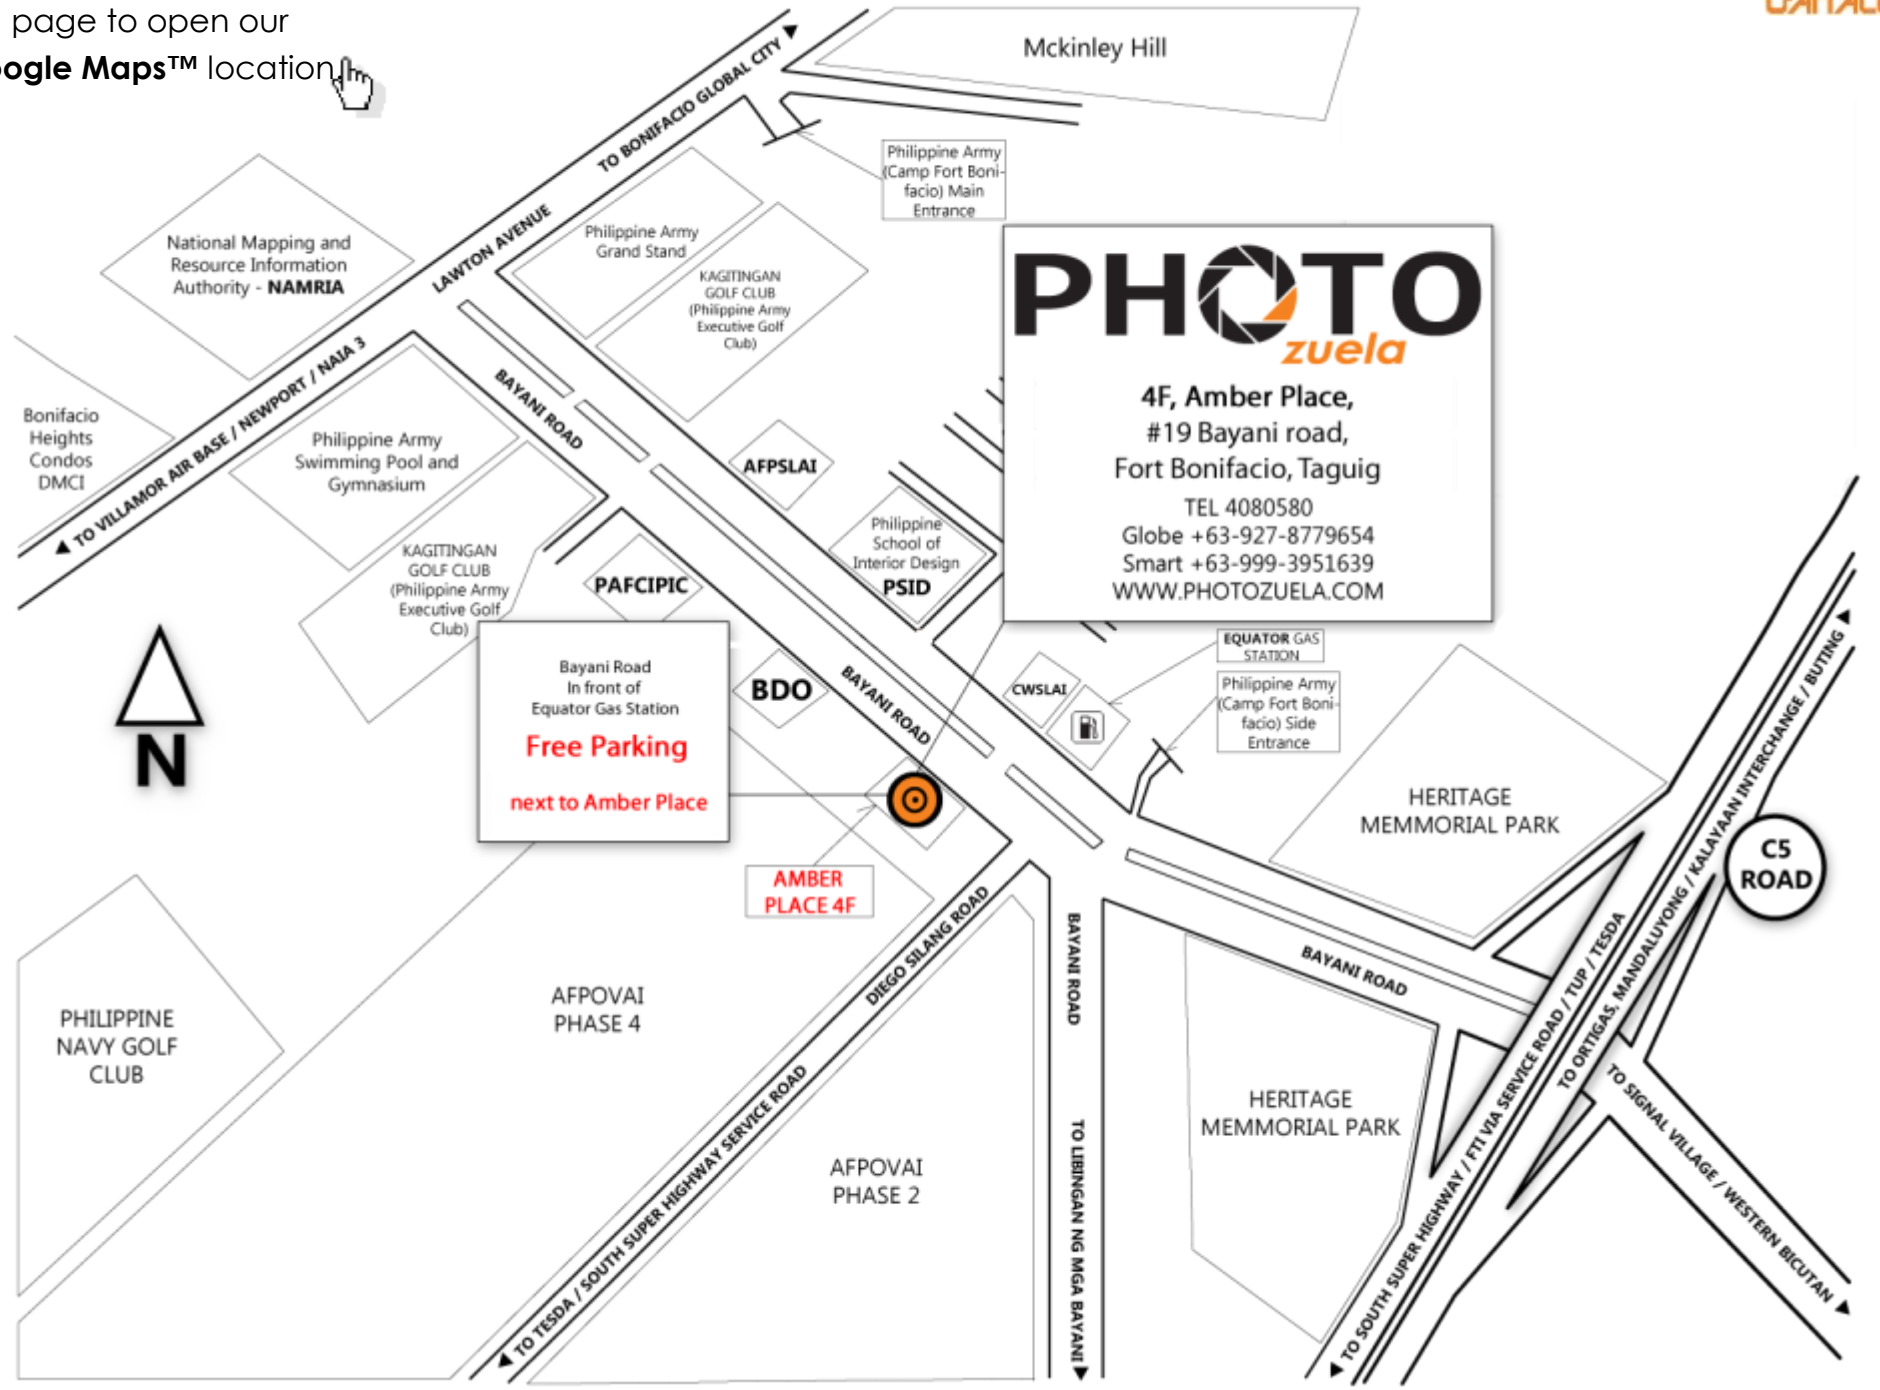

PHOTOZUELA®

Live your passion well equipped.

WWW.PHOTOZUELA.COM "Photozuela," its colors, designs and logos are registered trademarks. **powered by**